


# Apt-IC6 Specification Sheet.

## Image



## Frequency Response

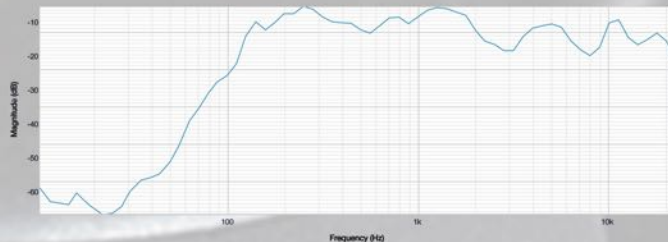


## Specification:

<b>Rated Power (AES)</b>	150w
<b>Rated Impedance:</b>	8Ω
<b>SPL (1w1m)</b>	94dB
<b>SPL max:</b>	116dB
<b>Frequency response:</b>	90Hz - 20KHz
<b>Component:</b>	6.5" Kevlar Paper 1.5" VC (Ferrite)& 1" Silk Dome Tweeter (Neo)
<b>IP rating:</b>	IP20
<b>Enclosure:</b>	9mm Birch ply
<b>Finish:</b>	Black, White or *Custom colour
<b>Flying points:</b>	4 x M6 Back and Side (power drive 50) , 35mm Tophat with M20 Threaded Polemount
<b>Connector:</b>	2 x Neutrik Speakon
<b>Weight:</b>	5Kg

## Dimensions

**Dimensions (HWD):** 250,142,166mm

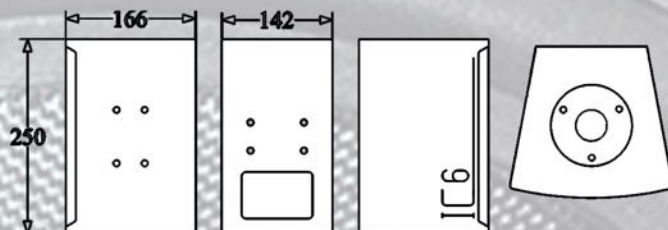

## Recommended Settings & Accessory

<b>Crossover settings:</b>	90Hz 24dB LR
<b>With Sub:</b>	120Hz 24dB LR
<b>Amplifier:</b>	300w RMS

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.