


# Apt-SM15 Passive Specification Sheet.

## Image



## Dimensions


<b>Dimensions (HWD):</b>	415, 550, 600mm
--------------------------	-----------------

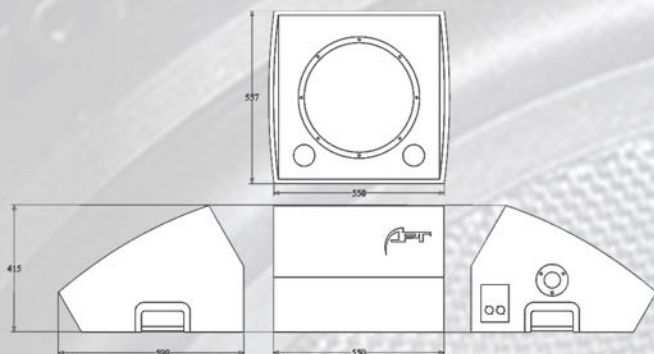

## Specification:

<b>Rated Power (AES)</b>	600w
<b>Rated impedance:</b>	8Ω
<b>SPL (1w1m)</b>	97dB
<b>SPL max:</b>	126dB
<b>Frequency response:</b>	65Hz - 19KHz
<b>Component:</b>	15" (3.38" coil) Neodymium cast woofer
	2.5" Titanium compression HF
<b>Dispersion angle:</b>	80 by 70 degree
<b>IP rating:</b>	IP20
<b>Wedge angle:</b>	30degree
<b>Enclosure:</b>	15mm Birch ply
<b>Finish:</b>	Black, White or *Custom colour
<b>Mounting:</b>	35mm Tophat with M20 thread
<b>Feet locations:</b>	3 on side and 4 on base
<b>Connector:</b>	2x Neutrik Speakons or **binding post
<b>Weight:</b>	24kg

## Frequency Response

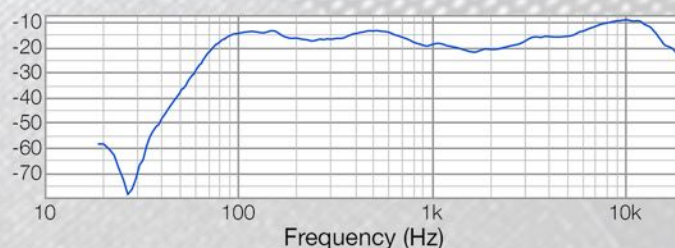

## Recommended Settings & Accessory

<b>Crossover settings:</b>	50Hz LR 24dB
<b>Correction EQ:</b>	HS 15000Hz, +2dB, 10Q
	2500Hz, -2.5dB, 3.Q
<b>Amplifier:</b>	850w RMS
<b>Recommend Sub:</b>	APT-SC18.1
	APT-SC15.1
<b>Poles:</b>	35mm speaker stand or pole
	Penn Elcom M20 threaded pole

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.