


# Apt-TB1281 Specification Sheet.

## Image




## Dimensions

Dimensions (HWD): 900, 480, 430mm

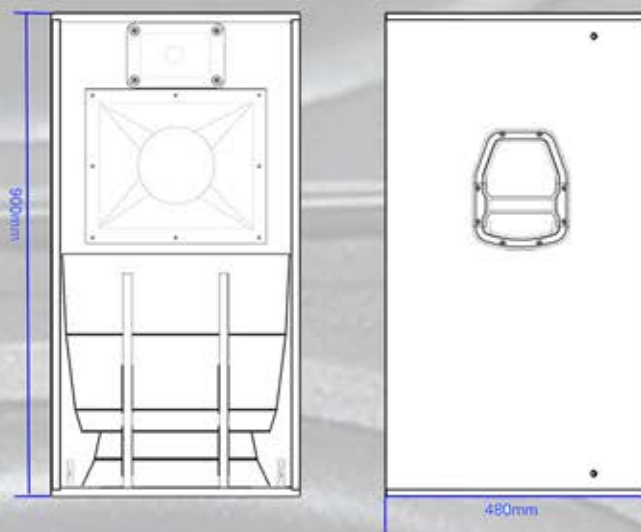

## Specification:


Rated Power	1000w (700w + 300w)
Rated impedance:	8Ω Low Mid, 8Ω High Mid + HF
SPL (1w1m)	101dB Low Mid 104dB High Mid + HF
Components:	1 x 12" Driver Low Mid, 8" High Mid & 1.4" HF
Dispersion angle:	V40° x H60°
IP rating:	IP20
Wedge angle:	10°
Enclosure:	15mm Birch ply
Finish:	Black, White or *Custom colour
Flying points:	16 x M10 Fixing Points
Handling:	2 x Metal Handles on Side, Corner Handles top and Bottom
Connector:	2 x Neutrik Speakon
Weight:	30Kg



## Recommended Settings & Accessory

Crossover SC181:	35Hz BW 24dB - 100Hz BW 12dB
Crossover Low Mid ±1:	100Hz BW 18dB - 450Hz BW 18dB
Crossover High Mid ±2:	450Hz BW 18dB - Out
Time Correction	Sub: 0.583ms
	Low Mid: 0.0ms
	High Mid & HF: 0.437ms
Correction EQ:	18.1KHz HS +2dB, 3KHz -3dB 5Q
	61Hz +2 10Q, 41Hz +3dB 5Q
Optional Extras	Wheel Board, Tilt Board, Grill

## Frequency Response

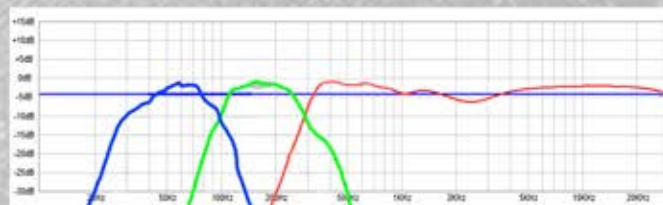

\* Custom paint colours may incur extra cost and increase build time.  
 \*\* Binding Post, 4 Pole euro block connector available may increase build time.  
 Feet are not supplied on all cabins that have locations on them  
 Specification can be changed by APT-GB with out prior notice.  
 Apt-GB is trading as part of the GGPM LTD Group.