


Apt-SC18.1 Specification Sheet.

Image



Dimensions

Dimensions (HWD): 567, 762, 560mm

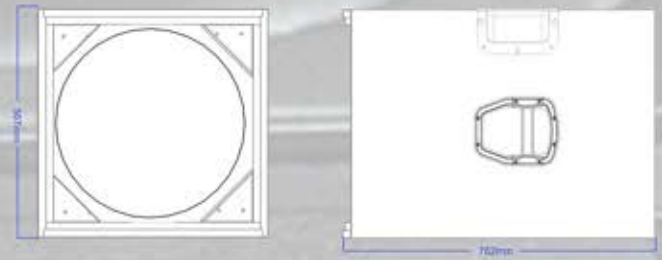


Specification:

Rated Power (AES)	1600w
Rated impedance:	8Ω
SPL (1w1m)	96dB
SPL max:	130dB
Frequency response:	32Hz - 175KHz
Component:	18" (4" coil) ferrite cast woofer
IP rating:	IP20
Enclosure:	18mm Birch ply
Finish:	Black, White or *Custom colour
Fixing points:	4x M8x4 wheel fixing
	35mm Tophat
	Poll mount M20 thread
Handles	2 x Metal handles on Side, 2 x Corner Handles on Top
Connector:	2x Neutrik Speakons or **binding post
Weight:	35Kg

Recommended Settings & Accessory

Crossover settings:	25Hz LR 24dB
	100Hz LR 24dB
	125Hz LR 24dB with Top Pack
Correction EQ:	63Hz, 3dB, 15Q
Amplifier:	2500w RMS
Recommend Top pack:	TB1281, Array-6, CL55H, Axail12
	APT-SM12A (as drum fill)

Frequency Response

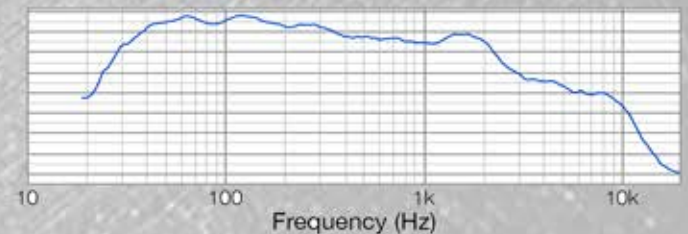

* Custom paint colours may incur extra cost and increase build time.
 ** Binding Post, 4 Pole euro block connector available may increase build time.
 Feet are not supplied on all cabins that have locations on them
 Specification can be changed by APT-GB with out prior notice.
 Apt-GB is trading as part of the GGPM LTD Group.